

Effects of spanwise rotation on turbulent channel flow

Geert Brethouwer^{1*}

¹*Linné FLOW Centre and Swedish e-Science Research Centre,
KTH Mechanics, SE-100 44 Stockholm, Sweden*

A study of fully developed plane turbulent channel flow subject to spanwise system rotation through direct numerical simulations is presented. In order to study both the influence of the Reynolds number and spanwise rotation on channel flow, the Reynolds number $Re = U_b h / \nu$ is varied between 5000 and 31 600 and the rotation number $Ro = 2\Omega h / U_b$ is varied between 0 and 2.7, where U_b is the mean bulk velocity, h the channel half gap and Ω the system rotation rate. The mean streamwise velocity profile displays also at higher Re the characteristic linear part with a slope near to 2Ω and a corresponding linear part in the profiles of the production and dissipation rate of turbulent kinetic energy appears. With increasing Ro a distinct unstable side with large spanwise and wall-normal Reynolds stresses and a stable side with much weaker turbulence develops in the channel. The flow starts to relaminarize on the stable side of the channel and persisting turbulent-laminar patterns appear at higher Re . If Ro is further increased the flow on the stable becomes laminar-like while at yet higher Ro the whole flow relaminarizes, although the calm periods might be disrupted by repeating bursts of turbulence, as explained by Brethouwer (2016). The influence of the Reynolds number is notable, in particular on the stable side of the channel where velocity fluctuations are stronger at higher Re . Visualizations and spectra show that at lower Ro large counter rotating streamwise roll cells develop on the unstable side. These become less noticeable and disappear when raising Ro , especially at higher Re . Large-scale structures are present on the unstable side at lower Ro according to spectra, but these structures vanish if Ro is raised.

I. INTRODUCTION

Turbulent plane channel flow subject to rotation about the spanwise direction displays several phenomena of interest to engineering applications and turbulence modelling (Jakirlić *et al.* 2002). Effects of rotation on flow and turbulence are in this case non-trivial. Channel flow is unaffected by rotation if fluid motions are two-dimensional and perpendicular to the rotation axis (Tritton 1992), for example, laminar Poiseuille flow and waves perpendicular to the rotation axis are not influenced (Brethouwer *et al.* 2014). Yet, it is well-established that spanwise rotation strongly influences Reynolds stresses, anisotropy and structures, and the mean velocity profile in plane turbulent channel flow (Johnston *et al.* 1972). Rotation effects are therefore obviously related to three-dimensional turbulent processes.

A useful parameter when discussing rotation effects on turbulent shear flows is the ratio of background and mean shear vorticity. For a unidirectional shear flow with mean velocity $U(y)$ in the x -direction and shear vorticity $-dU/dy$ rotating with angular velocity Ω about the z -axis, this ratio is given by

$$S = -\frac{2\Omega}{dU/dy}. \quad (1)$$

When $S > 0$ the mean shear and background vorticity have the same sense of rotation and rotation is cyclonic and when $S < 0$ they have the opposite sense and rotation is anti-cyclonic. Simple theoretical considerations (Tritton 1992) and rapid distortion theory as

well as direct numerical simulation (DNS) of rotating homogeneous turbulent shear flow demonstrate that turbulence is damped if $S > 0$ and $S < -1$ and augmented if $-1 < S < 0$ (Brethouwer 2005).

Experiments of fully developed turbulent plane channel flow subject to spanwise rotation by Johnston *et al.* (1972) at $Re = U_b h / \nu = 5750$, $Ro = 2\Omega h / U_b \leq 0.21$ and $Re = 17500$, $Ro \leq 0.081$, and by Nakabayashi & Kitoh (2005) at $Re \leq 2750$ and $Ro \leq 0.056$, where U_b is the bulk mean velocity, h channel half-width, ν viscosity and Ω rotation rate, have shown that turbulence is suppressed on one side of the channel where $S > 0$ and augmented on the other side where $-1 < S < 0$, in accordance with the discussion above. These sides are from now on called the stable and unstable side, respectively. DNS of spanwise rotating channel flow by Kristoffersen & Andersson (1993) at $Re_\tau = 194$ and $Ro \leq 0.5$, Lamballais *et al.* (1996) at $Re = 2500$ and $Ro \leq 1.5$, Nagano & Hattori (2003) at $Re_\tau = 150$ and $Ro_\tau \leq 5$, and Liu & Lu (2006) at $Re_\tau = 194$ and $Ro_\tau \leq 7.5$, where Re_τ and Ro_τ are based on the friction velocity instead of U_b , were consistent with the experimental observations. At sufficiently high Ro the suppression of turbulence is so strong that the flow becomes laminar-like on the stable side.

The asymmetry of the Reynolds stresses induces a skewed mean velocity profile and differences in the shear stresses on the two walls. Another notable feature is the appearance of a region in the channel where the mean velocity profile is linear with a slope $dU/dy \approx 2\Omega$, i.e. $S \approx -1$, implying that the absolute mean vorticity is nearly zero. Spanwise rotation affects turbulence anisotropy too since wall-normal fluctuations are typically strongly augmented on the unstable side (Kristof-

* geert@mech.kth.se

fersen & Andersson 1993), again in line with DNS of rotating homogeneous shear flow (Brethouwer 2005). Another consequence of spanwise system rotation is the emergence of large streamwise roll cells at certain Ro , as indicated by experiments and DNS (Johnston *et al.* 1972, Kristoffersen & Andersson 1993).

Higher Ro was considered by Grundestam *et al.* (2008), who performed DNS of spanwise rotating channel flow at $Re_\tau = 180$ and $Ro \leq 2.49$. Besides one-point statistics, they studied the effect of rotation on turbulent structures and Reynolds stress budgets. They observed that at higher Ro turbulence was weak as well on the unstable side, suggesting that the flow fully relaminarizes at sufficiently high Ro . This can be understood from the fact that in Poiseuille flow $S \geq 0$ and $S \leq -1$ everywhere in the channel if $Ro \geq 3.0$. A more rigorous stability analysis shows that all modes with spanwise wavenumber $\beta \neq 0$ are linearly stable for $Ro > Ro_c$ in plane Poiseuille flow with spanwise rotation (Wallin *et al.* 2013). The critical rotation number Ro_c is a monotonic function of Re , i.e. $Ro_c = 2.80$ for $Re = 10000$ and $Ro_c \rightarrow 3.0$ for $Re \rightarrow \infty$. DNS confirms that the flow relaminarizes when $Ro \rightarrow Ro_c$ (Wallin *et al.* 2013).

However, Tollmien-Schlichting (TS) waves with a wave vector normal to the rotation axis are unaffected by spanwise rotation and become linearly unstable in plane Poiseuille flow if $Re \geq 3848$ (Schmid & Henningson 2001). DNS indeed reveal TS wave instabilities resulting in a continuous cycle of turbulent bursts if $Ro \simeq Ro_c$ and the flow is basically laminar (Wallin *et al.* 2013). Absence of turbulence though is not a prerequisite for TS instabilities, as shown by Brethouwer *et al.* (2014) who have observed cyclic bursts of intense turbulence triggered by an unstable TS wave in DNS at $Re = 20000$ and $Ro = 1.2$ when turbulence is strong on the unstable side. An extensive study of DNSs of spanwise rotating channel flow reveals that these cyclic turbulent bursts and TS wave instabilities show up in a quite wide range of Re and Ro including cases with overall weak turbulence as well as strong continuous turbulence on the unstable side (Brethouwer 2016). The observed TS instability growth was compared with linear stability theory predictions and analyzed in detail.

A further study of spanwise rotating channel flow was done by Yang & Wu (2012). They carried out DNSs at $Re_\tau = 180$ and applied a helical wave decomposition. This shows that at low Ro energy concentrates in large modes, which may be linked to the formation of roll cells, while at higher Ro energy accumulates at smaller scales. DNSs at $Re_\tau = 180$ and a wide range of Ro were also performed by Xia *et al.* (2016). They studied various one-point statistics and observed a linear part in the profile of the streamwise Reynolds stress production at sufficiently high Ro .

The previous studies of spanwise rotating channel flow were mostly limited to low Reynolds numbers, $Re_\tau \leq 194$, meaning that the influence of the Reynolds number

on the statistics, turbulent structures and relaminarization on the stable side can be significant. An exception to these studies is the experiments of Johnston *et al.* (1972) at somewhat higher Re albeit limited to low Ro . I have carried out DNSs of plane turbulent channel flow subject to spanwise rotation at low as well as higher Re and with larger computational domains than in the aforementioned numerical studies and for a wide range of Ro . The aims of the my study are to determine if the effects of rotation on turbulence discussed above are generic, i.e. also observed at higher Re , to examine the influence of Re , and to further investigate the influence of rotation on turbulence structures and Reynolds stress budgets. Moreover, data of rotating channel flow at higher Re are important for turbulence modelling.

II. NUMERICAL METHOD AND PARAMETERS

The velocity $\mathbf{u}$ in the DNSs is governed by the incompressible Navier-Stokes equations

$$\frac{\partial \mathbf{u}}{\partial t} + \mathbf{u} \cdot \nabla \mathbf{u} = -\nabla p + \frac{1}{Re} \nabla^2 \mathbf{u} - Ro(\mathbf{e}_z \times \mathbf{u}), \quad \nabla \cdot \mathbf{u} = 0, \quad (2)$$

where $\mathbf{e}_z$ is the unit vector in the z -direction and p the pressure including the centrifugal acceleration. The equations are nondimensionalized by the mean bulk velocity U_b and channel half gap h ; time t is thus given in terms of a convection time h/U_b . Streamwise, wall-normal, spanwise coordinates are denoted by x, y, z , respectively, and boundary conditions are periodic in the streamwise and spanwise directions and no-slip at the walls. A sketch of the geometry is shown in Brethouwer (2016). In the present DNSs $y = -1$ and 1 correspond to the wall on the unstable and stable channel side, respectively.

Equations (2) are solved with a pseudo-spectral code with Fourier expansions in the homogeneous x - and z -direction and Chebyshev polynomials in the y -direction (Chevalier *et al.* 2007) and the spatial resolution is similar as in previous channel flow DNSs (Lee & Moser 2015). In all runs the flow rate and thus Re was kept constant by adapting the mean pressure gradient. Re is varied from 5000 up to 31 600 and Ro from 0 (nonrotating) to about Ro_c which is between 2.67 to 2.87 for this range of Re . In most DNSs, the streamwise and spanwise domain size are either $12\pi h \times 10.5h$ or $8\pi h \times 3\pi h$, but in some DNSs the domain size was chosen differently to accommodate TS instabilities, as explained in Brethouwer (2016), but this variation has little effect on results presented here. The runs are sufficiently long to reach a statistically stationary state in all DNSs. Parameters of the DNSs at $Re = 10000$ to 31 600 are listed in table I. The friction velocity is calculated as $u_\tau = [u_{\tau u}^2/2 + u_{\tau s}^2/2]^{1/2}$, where $u_{\tau u}$ and $u_{\tau s}$ are the friction velocity of unstable and stable channel side, respectively (Grundestam *et al.* 2008). Re_τ^u and Re_τ^s are Reynolds numbers based on $u_{\tau u}$ and

$u_{\tau s}$, respectively. With this definition the mean dimensional pressure gradient $\partial P/\partial x = \rho u_{\tau}^2/h$, where ρ is the fluid density. The DNSs studied here are basically the same as those in Brethouwer (2016).

TABLE I. DNS parameters: N_x , N_y and N_z are the number of modes in the streamwise, wall-normal and spanwise direction, and L_x and L_z , are the streamwise and spanwise computational domain size, respectively.

Re_b	Ro	Re_{τ}	Re_{τ}^u	Re_{τ}^s	$L_x/h \times L_z/h$	$N_x \times N_y \times N_z$
31 600	0	1505	1505	1505	$12\pi \times 10.5$	$6144 \times 577 \times 3456$
31 600	0.45	1213	1445	925	$12\pi \times 10.5$	$4608 \times 481 \times 2560$
31 600	0.9	822	988	613	$12\pi \times 10.5$	$3072 \times 385 \times 1728$
31 600	1.2	562	670	428	$12\pi \times 10.5$	$2048 \times 257 \times 1152$
30 000	1.5	415	462	363	$8\pi \times 3\pi$	$1024 \times 193 \times 768$
30 000	2.1	319	318	319	$8\pi \times 4.8\pi$	$864 \times 161 \times 864$
30 000	2.4	302	306	298	$8\pi \times 3\pi$	$640 \times 193 \times 512$
30 000	2.7	301	302	300	$7.5\pi \times 3\pi$	$432 \times 161 \times 384$
20 000	0	1000	1000	1000	$8\pi \times 3\pi$	$2560 \times 385 \times 1920$
20 000	0.15	976	1107	825	$8\pi \times 3\pi$	$2304 \times 385 \times 1728$
20 000	0.45	800	964	594	$8\pi \times 3\pi$	$2048 \times 361 \times 1536$
20 000	0.9	544	677	365	$8\pi \times 3\pi$	$1536 \times 257 \times 1152$
20 000	1.2	423	501	326	$8\pi \times 3\pi$	$1152 \times 217 \times 864$
20 000	1.5	333	370	292	$29.4 \times 4\pi$	$864 \times 193 \times 768$
20 000	2.1	259	265	252	$8\pi \times 3\pi$	$512 \times 161 \times 432$
10 000	0	544	544	544	$8\pi \times 3\pi$	$1152 \times 193 \times 864$
10 000	0.45	435	535	304	$8\pi \times 3\pi$	$1024 \times 193 \times 768$
10 000	0.9	339	416	240	$8\pi \times 3\pi$	$768 \times 161 \times 576$
10 000	1.2	277	325	219	$8\pi \times 3\pi$	$576 \times 129 \times 432$
10 000	1.5	226	249	199	$16\pi \times 6\pi$	$1280 \times 161 \times 960$
10 000	1.8	196	207	185	$16\pi \times 6\pi$	$1024 \times 129 \times 768$
10 000	2.1	182	186	178	$16\pi \times 6\pi$	$640 \times 129 \times 512$

III. FLOW VISUALIZATIONS

Before discussing flow statistics and spectra visualizations are presented to get some understanding of the main flow characteristics. In all following two-dimensional visualizations the complete domain is shown. Figure 1 shows plots of the instantaneous streamwise velocity in an x - z plane close to wall on the stable side for $Ro \leq 1.2$. Structures with a width of $O(h)$ are vaguely visible at $Ro = 0$ (figure 1.a) indicating near-wall turbulence modulation by large-scale outer structures (Mathis *et al.* 2009). In rotating channel flow, turbulence becomes progressively weaker on the stable side with increasing rotation speeds. At $Re = 20\,000$ and $Ro = 0.15$ the flow is still fully turbulent on the stable channel side, but at $Ro = 0.45$ the flow is not fully turbulent anymore and regions with turbulence as well as laminar-like flow can be seen. At $Re = 20\,000$ and $Ro = 0.45$ one distinct oblique turbulent and laminar pattern can be observed (figure 1.e) whereas at a higher $Re = 31\,600$ and the same Ro in a DNS with a larger do-

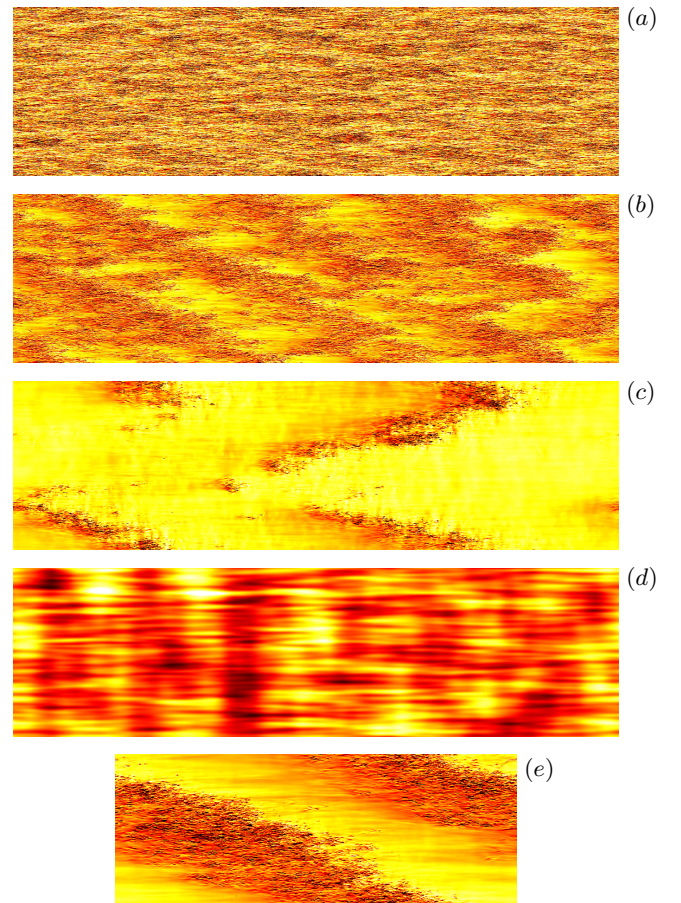


FIG. 1. Visualizations of the instantaneous streamwise velocity in an x - z plane close to the wall on the stable channel side. Dark colours signify high velocities. $Re = 31\,600$ and (a) $Ro = 0$, (b) $Ro = 0.45$, (c) $Ro = 0.9$, (d) $Ro = 1.2$. (e) $Re = 20\,000$ and $Ro = 0.45$.

main turbulent-laminar patterns are more numerous but less explicit (figure 1.b). Similar oblique patterns have been observed in e.g. transitional plane Couette flow (Barkley & Tuckerman 2007, Duguet *et al.* 2010) as well as in other flows with some stabilizing force like stratified open channel flow, MHD channel flow and rotating Couette flows (Brethouwer *et al.* 2012) and stratified Ekman layers (Deusebio *et al.* 2014). In rotating channel flow the patterns only exist on the stable side since the other side is fully turbulent. The turbulent-laminar are no transitional but persists in time, like in the aforementioned studies.

At the same $Ro = 0.45$ but lower $Re = 10\,000$ turbulent regions appear as spots or incomplete band-like structures while at a still lower $Re = 5000$ only very local disturbances are observed (not shown here) indicating that the turbulent fraction on the stable side grows with Re at fixed Ro . A speculation is that oblique turbulent-laminar patterns do exist at low Re but at a lower Ro when the stabilizing Coriolis force is less strong, but at

a lower Re they can have a longer wave length, as indicated by Brethouwer *et al.* (2012). In previous DNSs of rotating channel flow discussed in the Introduction such patterns have not been observed, which is likely owing to the use of fairly limited computational domains. On the other hand, Johnston *et al.* (1972) observed in a certain Re - Ro range laminar flows interluded with turbulent spots on the stable channel side in their experiments confirming that such transitional flows are found at lower Ro and Re .

Continuing with the present cases, at a higher $Ro = 0.9$ the turbulent fraction becomes smaller and the turbulent regions appear as spots and bounded band-like oblique structures (figure 1.c) while at $Ro = 1.2$ no small-scale turbulence is present and only weak larger scale fluctuations are seen on the stable channel side (figure 1.d). In the latter case, a continuous cycle of strong turbulent bursts with a long period of $O(1000h/U_b)$ on the stable side occurs caused by a linear TS wave instability (Brethouwer 2016) and a vague imprint of the TS wave is seen in figure 1. At other times the TS wave is often more prominent. If $Ro = 0.9$ and $Re = 20\,000$ or lower, no turbulent spots or band-like structures are seen and only weak larger-scale fluctuations are observed, illustrating that Re effects can be appreciable.

Figure 2 shows at three different Ro λ_2 isocontours (Jeong & Hussain 1995) coloured with the streamwise velocity to identify vortices. The strongly turbulent unstable side of the channel with intense vortices obviously shrinks with Ro . Between the unstable side with strong turbulence and clearly identifiable vortices and stable side with weak turbulence a seemingly sharp and flat border exists (figure 2.a-c), as was noted by Johnston *et al.* (1972), although when $Ro = 0.9$ some areas with vortices corresponding to the patterns in figure 1.c can still be seen on the stable side. Close ups of the vortices on the border between the unstable and stable channel side at $Ro = 0.9$ and 1.2 in figure 2.d and e reveal elongated streamwise vortices and, remarkably, packages of hairpin vortices which are completely detached from the wall. The red colour signifies that the hairpin vortices are found near the streamwise velocity maximum. At higher Ro vortices become more and more aligned with the streamwise direction, as Lamballais *et al.* (1996) have observed, and hairpin vortices are not visible anymore (not shown here).

Large, steady streamwise roll cells have been observed on the unstable side in several experimental and numerical studies of rotating channel flow. Steady means here that they have a relatively long life time, although in the experiments of Johnston *et al.* (1972) the roll cells, which were found on the unstable side, changed in time whereas in a DNS by Kristoffersen & Andersson (1993) the roll cells were very coherent and stationary at $Ro = 0.15$ and spanned the whole channel. Lamballais *et al.* (1996) observed roll cells in their DNS at $Ro = 0.5$ but not at $Ro = 1.5$ while Grundestam *et al.* (2008) have found them in a DNS at $Ro = 1.27$ and concluded that they

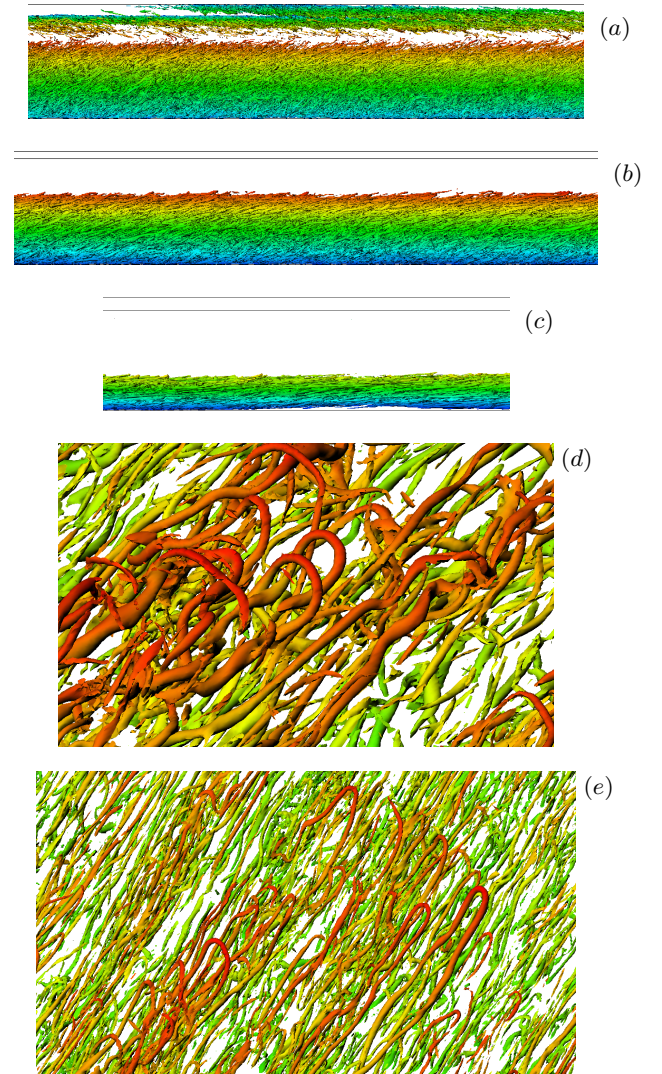


FIG. 2. Iso-contours of (a) $\lambda_2 = -9$ at $Re = 31\,600$ and $Ro = 0.9$, (b) $\lambda_2 = -2.25$ at $Re = 31\,600$ and $Ro = 1.2$, (c) $\lambda_2 = -0.45$ at $Re = 30\,000$ and $Ro = 2.1$ (side views, stable channel side is at the top) and close up at iso-contours of (d) $\lambda_2 = -5.6$ at $Re = 31\,600$ and $Ro = 0.9$, (e) $\lambda_2 = -2.25$ at $Re = 31\,600$ and $Ro = 1.2$. The isosurfaces are coloured with streamwise velocity. The velocity increases from blue to red.

were not very coherent.

Visualizations of the instantaneous wall-normal velocity field in the present DNSs are shown in figure 3. Narrow elongated streaks with positive wall-normal velocity away from the wall in a wall parallel x - z plane on the unstable side (figure 3.a) and regions with alternating positive and negative wall-normal velocity in the cross stream y - z plane at $Ro = 0.15$ and $Re = 20\,000$ (figure 3.d) indicate the presence of large streamwise roll cells on the unstable side that extend up to the border between the unstable and the stable side. The structures are long but not as coherent as in the DNS by Kristoffersen & Andersson (1993) since they appear to break

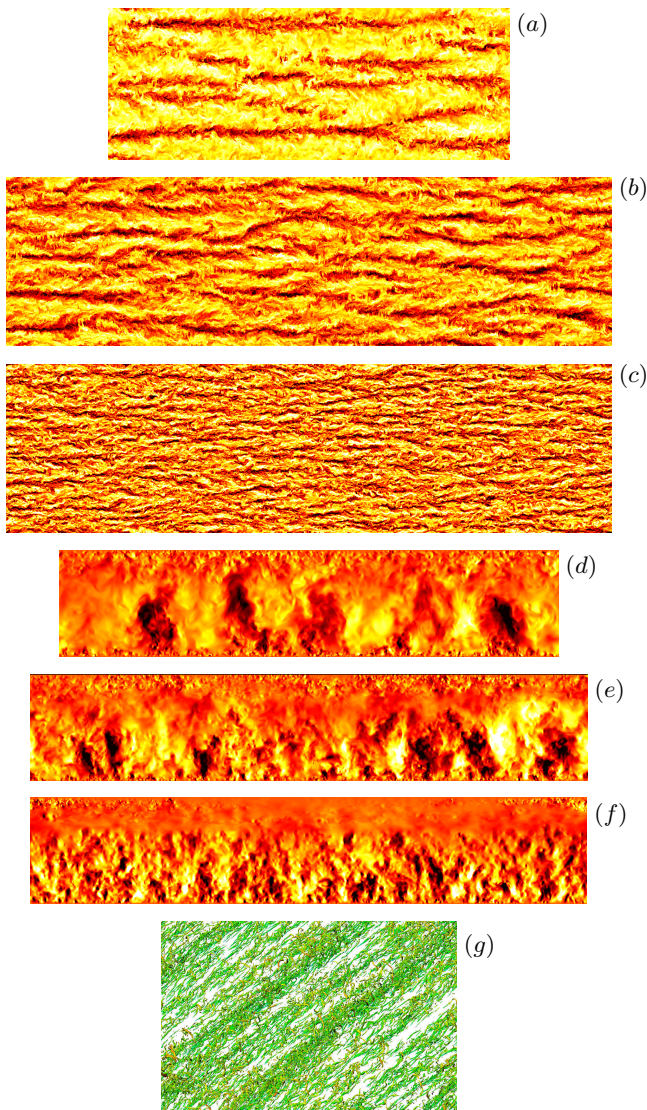


FIG. 3. Visualizations of the instantaneous wall-normal velocity in an x - z plane (a) at $y = -0.5$ and $Re = 20000$, $Ro = 0.15$, (b) at $y = -0.5$ and $Re = 31600$, $Ro = 0.45$, (c) at $y = -0.75$ and $Re = 31600$, $Ro = 0.9$ and in a y - z plane at (d) $Re = 20000$, $Ro = 0.15$, (e) $Re = 31600$, $Ro = 0.45$, (f) $Re = 31600$, $Ro = 0.9$. Dark colours signify positive velocities. (g) Isocontours of $\lambda_2 = -36$ at $Re = 20000$ and $Ro = 0.15$ near the wall on the unstable side. The flow is from bottom left to upper right corner.

up or split at some places. Possible reasons can be the higher Re and the larger computational domain in the present study which puts less constraints on the dynamics of the structures through the periodic boundary conditions. The clustering of intense vortices in streamwise near-wall streaks seen in figure 3.g makes clear that the roll cells modulate the near-wall dynamics on the unstable side.

Streaks with positive wall-normal velocity (figure 3.b) and large-scale regions with positive and negative wall-

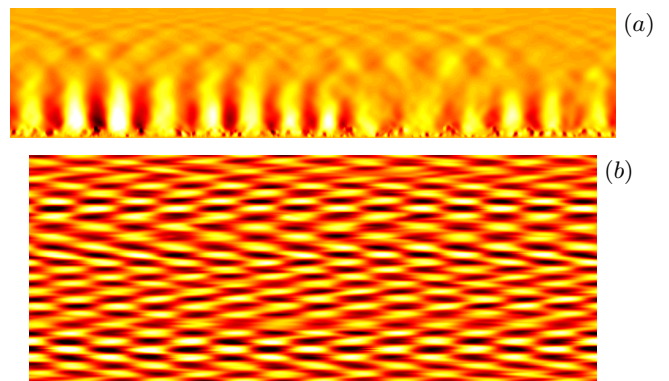


FIG. 4. Visualization of the instantaneous wall-normal velocity for $Re = 30000$ and $Ro = 2.7$ in a (a) y - z plane and in an (b) x - z plane at $y = -0.8$. Colour scale ranges from $v = -0.021$ to 0.021 in b.

normal velocity (figure 3.e) at $Ro = 0.45$ and $Re = 31600$ indicate roll cells, but they seem to be smaller and less coherent than at $Ro = 0.15$. Weak signs of roll cells are seen in figure 3.c and f in the DNS at $Ro = 0.9$ but the spacing and form of the streaks indicate that the roll cells are smaller and less coherent than at lower Ro . Similar signs of roll cells are also visible in the DNSs at $Ro = 0.45$ and 0.9 but lower Re (not shown here). When $Ro = 1.2$ or higher no visible signs of roll cells can be found at $Re = 20000$ and 31600 . However, at $Re = 5000$ visualizations indicate the existence of roll cells and Grundestam *et al.* (2008) observed them at $Ro = 1.27$ and $Re_\tau = 180$. These observations suggest that at lower Re roll cells are found up to high Ro . However, helical spectra obtained from rotating channel flow DNSs at $Re_\tau = 180$ by Yang & Wu (2012) indicate that roll cells are most energetic around $Ro = 0.15$ and become less and less energetic with increasing Ro , which seems broadly consistent with the visualizations here.

At higher Ro the unstable turbulent side becomes smaller and smaller and the flow tends to fully laminarize if Ro approaches Ro_c (Wallin *et al.* 2013). However, at high Ro streamwise and oblique modes are unstable as a result of rotation according to linear stability theory (Brethouwer 2016). Some of the largest linearly unstable modes become noticeable in the DNSs, see for example figure 4 showing typical oblique waves which are most significant on the unstable side in a DNS at $Re = 30000$ and $Ro = 2.7$, close to $Ro_c = 2.87$ for this Re . The waves are quite weak, i.e., the wall-normal velocity is about 2 to 3% of U_b in this case.

IV. FLOW STATISTICS

In this section, one-point statistics of the flow are presented and the effects of rotation are discussed. As mentioned before, linearly unstable TS waves cause strong

recurring bursts of turbulence on a long time scale in some DNSs. The instabilities and bursts are the topic of another study (Brethouwer 2016) and therefore not discussed in detail here. However, it should be noted that they can significantly affect flow structures and turbulence, especially on the stable side where the bursts are most intense. I have chosen to exclude the periods with the bursts as much as possible when computing the statistics, i.e. the statistics are almost solely based on the long calm periods between the periods, since the bursts are not the subject of this study. Besides, the bursts occur on a very long time scale of $O(1000h/U_b)$, which makes it practically impossible to obtain reasonable converged statistics if they are included, and they cannot be predicted by Reynolds stress and two-equation turbulence models. In the next parts, U is the mean streamwise velocity and u , v , w are the streamwise, wall-normal and spanwise velocity fluctuation, respectively. An overline implies temporal and spatial averaging in the homogeneous directions.

Figure 5 shows mean streamwise velocity profiles scaled by U_b at the highest Re considered for Ro up to 2.7. As in previous studies of turbulent channel flow subject to spanwise rotation (e.g. Kristoffersen & Andersson 1993, Grundestam *et al.* 2008, Xia *et al.* 2016), the mean velocity profile becomes asymmetric and develops an extended linear region where the slope $dU/dy \simeq 2\Omega$, i.e. $S \simeq -1$, implying an absolute mean vorticity close to zero. The velocity on the unstable side goes down while on the stable side it goes up and the profile becomes more and more parabolic-like with higher Ro . Beyond $Ro = 2.4$ the linear slope region disappears and the velocity profile approaches a laminar Poiseuille profile, as in the DNSs by Grundestam *et al.* (2008) and Xia *et al.* (2016).

Profiles of the root-mean-square (rms) of the streamwise, wall-normal and spanwise velocity fluctuations, u^+ , v^+ and w^+ , respectively, and the Reynolds shear stress $\overline{uv}^+$ normalized by $u_\tau[u_\tau^2/2 + u_{\tau s}^2/2]^{1/2}$ for Ro up to 2.1 are shown in figure 6. The results are for the highest Re considered here, 31 600 and 30 000. Note that for $Ro \geq 1.2$ the flow is subject to a TS-wave instability resulting in intense bursts of turbulence at this Re (Brethouwer 2016), but these periods with turbulent bursts are excluded as much as possible when computing the statistics as mentioned before. The statistics are thus mostly based on the long calm periods between the bursts.

Figure 6 shows that rotation causes a reduction of the turbulence intensity on the stable side, as expected (Johnston *et al.* 1972). Especially for the wall-normal component (figure 6.b) this reduction is apparent while for the other two velocity components it becomes most notable for $Ro \geq 1.2$. The turbulence on the unstable channel side displays a more complex behaviour. The peak of u^+ first raises with Ro but then declines if $Ro > 0.45$ whereas w^+ and especially v^+ strongly grow with Ro and only start to notably decline when

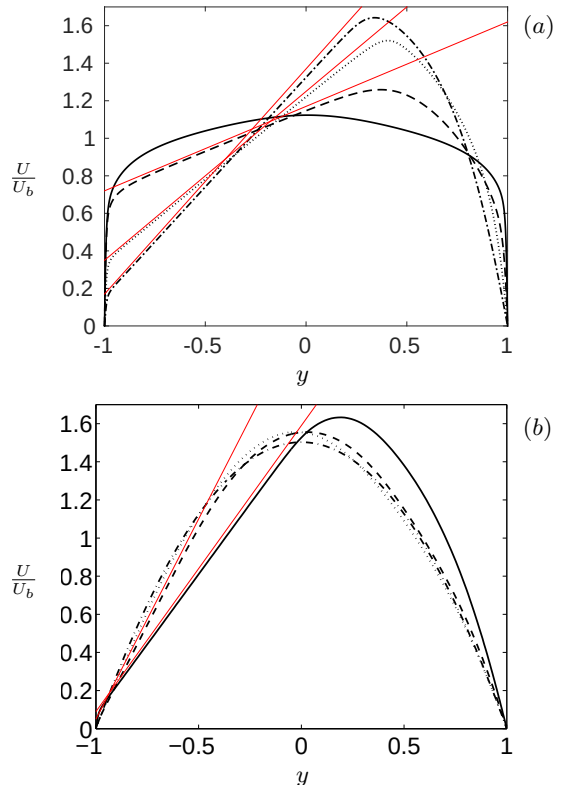


FIG. 5. Mean velocity profiles scaled by U_b . (a) $Re = 31\,600$. —, $Ro = 0$; ---, $Ro = 0.45$; ···, $Ro = 0.9$; - · - · -, $Ro = 1.2$. (b) $Re = 30\,000$. —, $Ro = 1.5$; ---, $Ro = 2.1$; ···, $Ro = 2.4$; - · - · -, $Ro = 2.7$. Slopes with $S = -1$ are shown by straight red lines.

$Ro > 1.5$. At higher Ro turbulence is progressively suppressed (not shown here) and the flow approaches more and more a laminar Poiseuille flow, as observed for the mean flow. Rotation has thus not only a marked influence on the turbulence intensity but also on its anisotropy, as in rotating homogeneous shear flows (Brethouwer 2005). The observed trends are in qualitative agreement with DNSs of rotating channel flow at lower Re (Grundestam *et al.* 2008). The maximum of v^+ is near the wall at $Ro = 0$ but remarkably far from the wall on the unstable side at $Ro = 0.45$, which may be due to the presence of roll cells, while at higher Ro it approaches the wall again.

From the mean momentum balance for rotating channel flow follows

$$-\overline{wv} + \nu \frac{dU}{dy} = u_{\tau u}^2 - u_{\tau}^2(y+1), \quad (3)$$

where the velocities are dimensional. The sum of the viscous and turbulent shear stresses is thus linear in y and is shifted only owing to the difference in the wall shear stresses on the unstable and stable channel sides in the rotating flow cases. These stresses are naturally higher on the unstable side owing to the more intense turbulence. When viscous stresses are negligible we find that the $\overline{wv}^+$

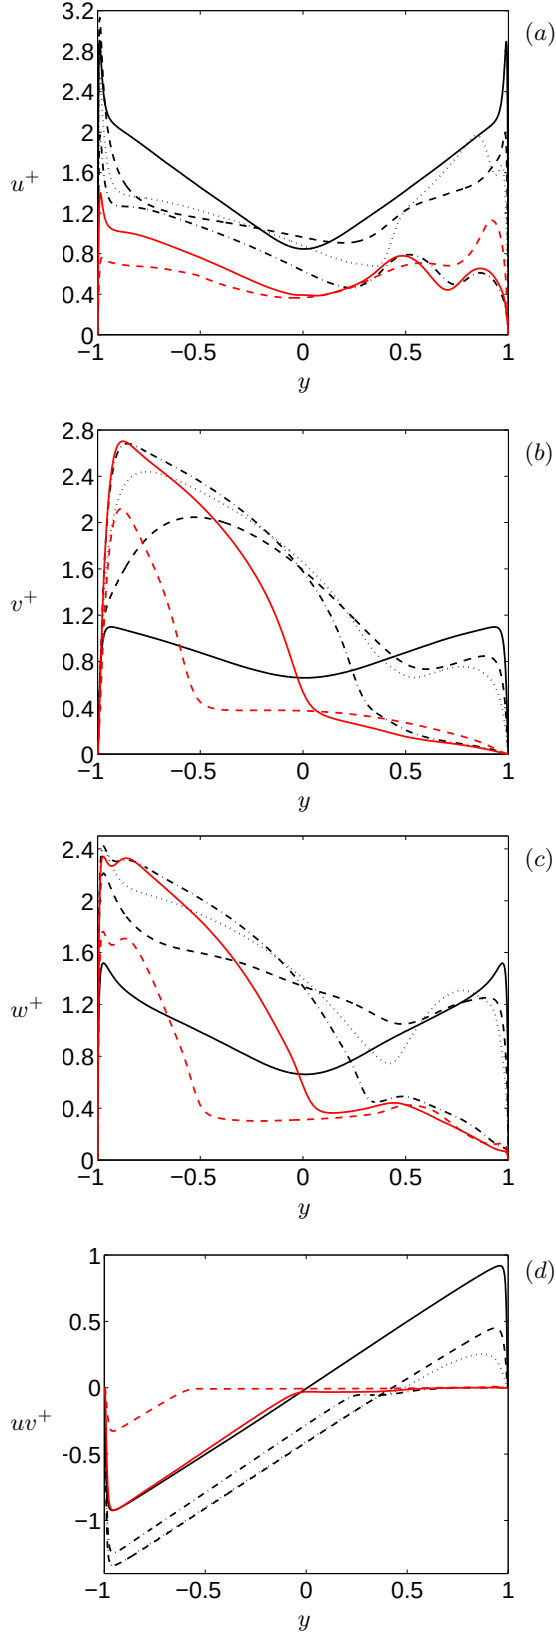


FIG. 6. Rms profiles of (a) streamwise, (b) wall-normal (c) spanwise velocity fluctuations and (d) $\overline{uv}$ profiles in wall units. $Re = 31\,600$ and (—) $Ro = 0$, (---) $Ro = 0.45$, (···) $Ro = 0.9$, (-·-·-) $Ro = 1.2$. $Re = 30\,000$ and (—) $Ro = 1.5$, (---) $Ro = 2.1$.

profile is also linear in y . But even if viscous stresses are not negligible, we obtain from equation (3) that in the part of the channel where $\nu dU/dy \simeq 2\nu\Omega = U_b^2 Ro/Re$ the turbulent shear stress approximates

$$\overline{uv} \simeq u_\tau^2(y+1) - u_{\tau u}^2 + U_b^2 \frac{Ro}{Re}, \quad (4)$$

implying that the $\overline{uv}^+$ profile is still linear in y and has a unit slope. Figure 6.(d) confirms that on the unstable side the $\overline{uv}^+$ profiles have a unit slope. The turbulent momentum transfer shifts progressively towards the unstable side with Ro and for $Ro \geq 1.2$ it is in fact negligible on the stable side where viscous stresses dominate. On the unstable side the magnitude of $\overline{uv}^+$ starts to decline when $Ro > 0.9$ and is small for $Ro \geq 2.1$. Viscous shear stresses are significant on the strongly turbulent unstable channel side at higher Ro because of the steep mean velocity gradient. If we estimate the total shear stress as u_τ^2 , we find that on the unstable side where $dU/dy \simeq 2\Omega$ the ratio between viscous and total stresses is approximately $Ro Re/Re_\tau^2$. From that follows that the viscous contribution grows with Ro and is about 12% and 26% at $Re = 31\,600$ and $Ro = 1.2$ and 1.5 , respectively, while even higher at the same Ro but lower Re . Once $Ro \gtrsim 2.0$ viscous stresses dominate also on the unstable side.

To investigate in more detail the turbulence near the wall on the unstable channel side, I present rms-profiles of the streamwise, wall-normal and spanwise velocity fluctuations, u^* , v^* , w^* respectively, in viscous wall units of the unstable side in figure 7 using a logscale for y^* . Velocity fluctuations are thus scaled by $u_{\tau u}$ and $y^* = (y+1)u_{\tau u}/\nu$ since $u_{\tau u}$ appears to be the most relevant quantity very close to the wall. Note that $u_{\tau u}$ can deviate quite significantly from u_τ , see table I. The peak of u^* on the unstable side declines and moves towards smaller y^* with Ro whereas the peaks of v^* and w^* grow with Ro until $Ro = 1.5$ and then decline. The peak of w^* moves towards the wall with Ro whereas that of v^* is found far away from the wall at $Ro = 0.45$ and comes closer to the wall with increasing Ro . We can also observe that the w^* profile has two peaks for $Ro \geq 1.2$.

The skewness of the streamwise velocity $S(u)$ and wall-normal velocity fluctuations $S(v)$ are presented in figure 8. $S(u)$ is typically negative away from the wall in non-rotating channel flow owing to ejections of low speed fluid (Kim *et al.* 1987). In rotating channel flow $S(u)$ becomes considerably more negative near the wall at $Ro = 0.45$ and 0.9 , except very near the wall. This could be caused by a reduction of sweeping events of high-speed flow towards the wall as a consequence of rotation (Kristoffersen & Andersson 1993), but the observed roll cells (see the previous section) could possibly play a role as well by increasing the frequency or intensity of the ejections of low-speed fluid away from the wall. Further away from the wall $S(u)$ attains small values in the rotating cases compared to the non-rotating case indicating that sweeping and ejection events are significantly altered by rotation. $S(v)$ has a large positive value near the wall on the

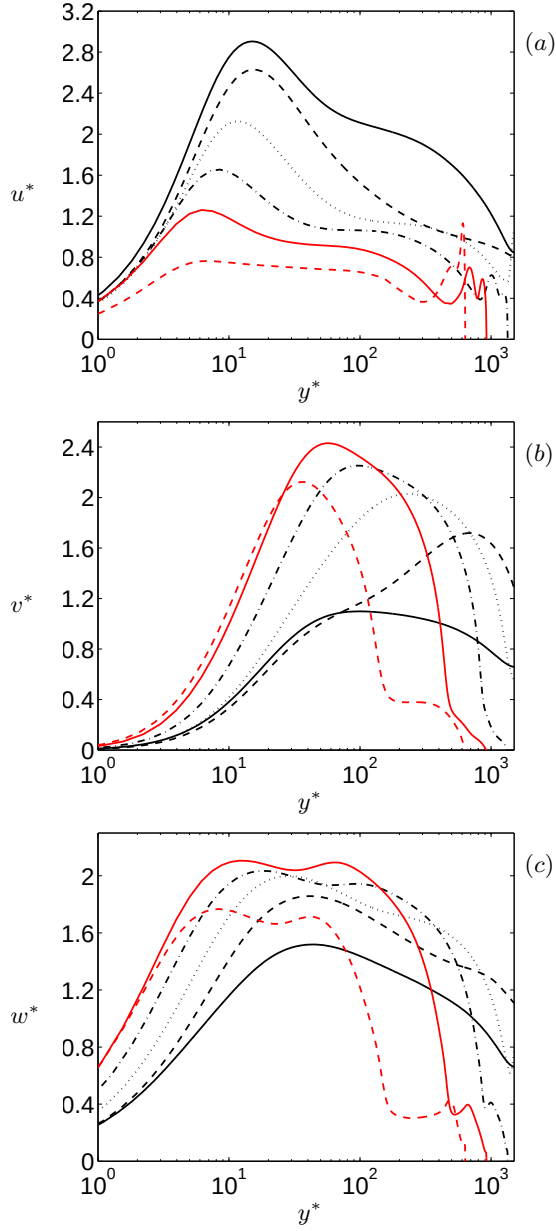


FIG. 7. Rms profiles of (a) streamwise, (b) wall-normal and (c) spanwise velocity fluctuations in wall units of the unstable side. $Re = 31600$ and (—) $Ro = 0$, (---) $Ro = 0.45$, (···) $Ro = 0.9$, (-·-·-) $Ro = 1.2$. $Re = 30000$ and (—) $Ro = 1.5$, (- - -) $Ro = 2.1$.

unstable side at $Ro = 0.45$ compared to $Ro = 0$ which is likely caused by roll cells that induce high-speed wall-normal velocity away from the wall. Similar behaviour of $S(v)$ was observed in the experiments by Nakabayashi & Kitoh (2015). Large positive values of $S(v)$ are also found in all rotating cases on the unstable side quite close to the maximum of U , indicating events with large positive wall-normal velocities. At $Ro = 1.2$ and 1.5 , $S(u)$ has large values near this position as well.

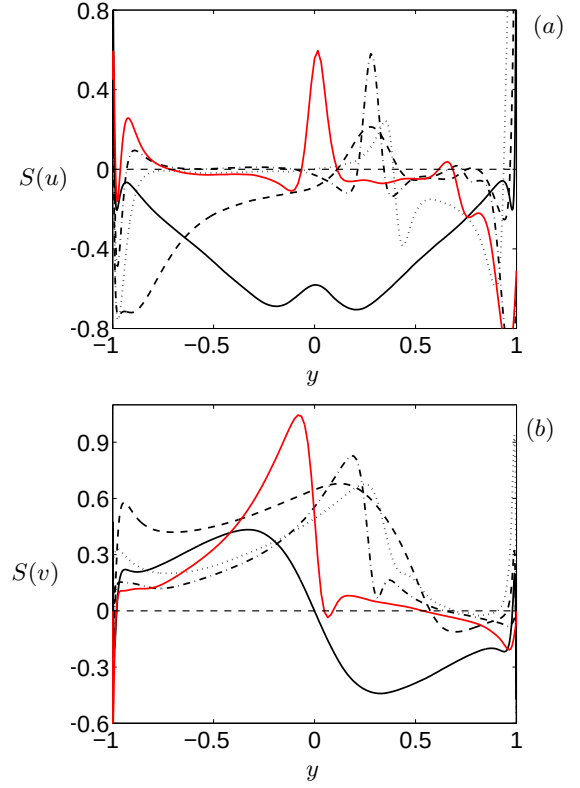


FIG. 8. Skewness of (a) u and (b) v . $Re = 31600$ and (—) $Ro = 0$, (---) $Ro = 0.45$, (···) $Ro = 0.9$, (-·-·-) $Ro = 1.2$. $Re = 30000$ and (—) $Ro = 1.5$.

The flatness of the wall-normal velocity $F(v)$ very near the wall attains extreme values in non-rotating channel flow as a result of intense near-wall vortices (Lenaers *et al.* 2012). The present DNSs show that with faster rotation $F(v)$ on the unstable channel side monotonically decays with Ro suggesting that intense near-wall vortices are suppressed.

V. INFLUENCE OF THE REYNOLDS NUMBER

Figure 9 shows profiles of the mean velocity U/U_b and fluctuations v^+ at $Ro = 0.45$ and 0.9 for four Re in order to examine the effects of Re on the flow. In all cases a region with a linear mean velocity profile where $S \simeq -1$ can be readily recognized demonstrating once more that the appearance of a region with a zero absolute mean vorticity is a fundamental feature of rotating channel flow. Its extent does not show much variation with Re and the same applies to the maximum value of v^+ on the unstable channel side. On the other hand, Re has an obvious influence on the mean velocity profile as well as v^+ on the stable channel side where at higher Re v^+ is considerably larger. Re has thus a marked influence on the flow, especially on the stable channel side, with stronger

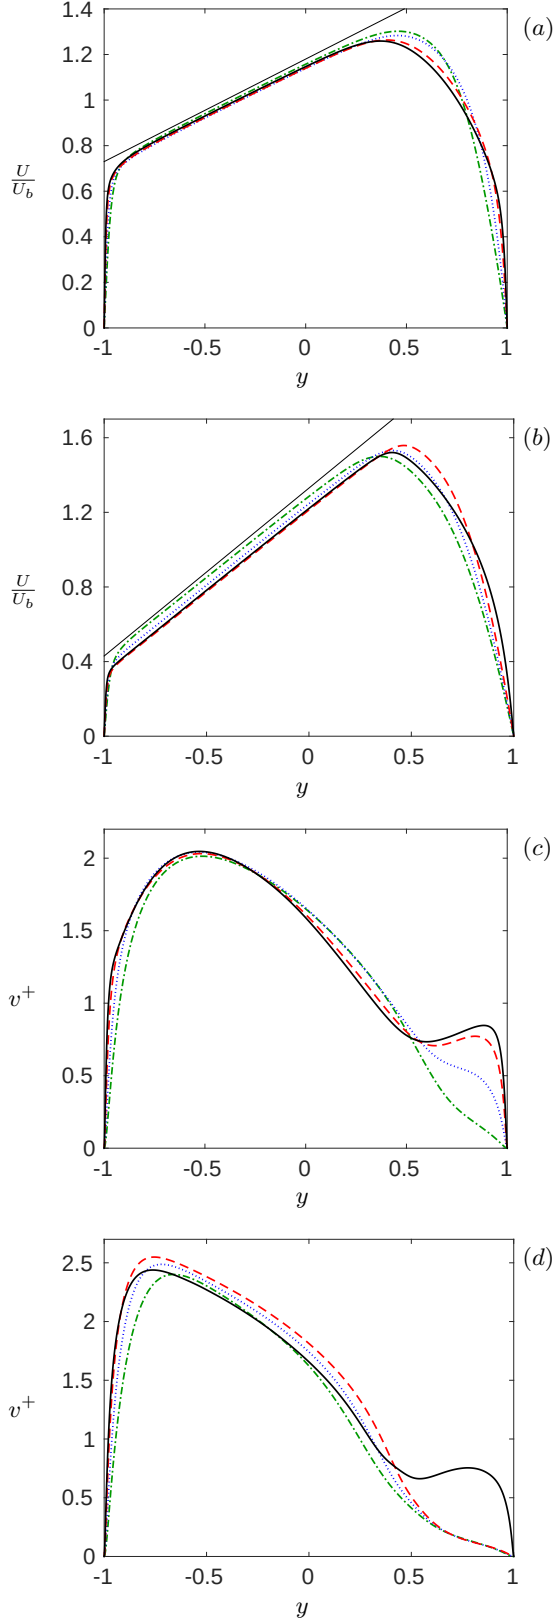


FIG. 9. (a) Mean velocity profiles scaled by U_b and (c) rms of v in wall units at $Ro = 0.45$ and —, $Re = 31\,600$; - - -, $Re = 20\,000$; ···, $Re = 10\,000$; - · - ·, $Re = 5000$. (b) and (d) are the same as (a) and (c), respectively, but for $Ro = 0.9$. The straight black line has a slope $S = -1$.

turbulence at higher Re . This was already indicated by the visualizations in figure 1 and corresponding discussion, noting that at higher Re turbulent patterns can be recognized at $Ro = 0.45$ and 0.9 while at lower Re these turbulent regions were mostly absent on the stable side.

Profiles of the rms of the velocity fluctuations in terms of wall units of the unstable side, i.e., velocity fluctuations scaled by $u_{\tau u}$ and y scaled by $\nu/u_{\tau u}$, for different Ro and Re are not presented here. However, the peak of the streamwise and spanwise fluctuations in general increases with Re at fixed Ro whereas the maximum of the wall-normal fluctuations is quite independent of Re but moves further away from the wall.

The volume-averaged turbulent kinetic energy K_m scaled by U_b^2 , mean wall shear stresses τ_w^u and τ_w^s on the unstable and stable channel sides respectively, and skin friction coefficient $C_f = \tau_w / (\frac{1}{2}\rho U_b^2)$ with $\tau_w = \frac{1}{2}(\tau_w^u + \tau_w^s)$ are shown in figure 10 at different Ro and Re . Figure 10.(a) shows that overall the turbulence intensity decays with Ro at fixed Re and becomes very weak at high Ro with similar trends for all Re . The data of Xia *et al.* (2016) are also included in the figure and show first a 15% growth in K_m/U_b^2 until $Ro = 0.44$ and then a quite similar decay as in the other cases, but note that in their DNS series $Re_\tau = 180$ and constant and therefore Re varies. The difference in τ_w on the stable and unstable side first grows substantially with Ro until its maximum found around $Ro = 0.9$, with the highest τ_w naturally occurring on the unstable side, but then diminishes and disappears at high Ro when the flow becomes laminar (figure 10.(b)). Again, the trends are similar at different Re but the maximum difference appears at lower Ro when Re is lower and is smaller at the highest Re , possibly because the flow relaminarizes less fast on the stable side at higher Re , as discussed before. The skin friction C_f decays monotonically with Ro , like K_m , and nearly equals the value for laminar Poiseuille flow for $Ro \geq 2.4$ at all Re (figure 10.(c)).

VI. BALANCES

In this section, the balance terms in the transport equations of the turbulent kinetic energy and Reynolds stresses are studied.

From equation (4) we obtain that the production of turbulent kinetic energy in part of the channel with the linear mean velocity profile is approximately (see also Xia *et al.* 2016)

$$\begin{aligned} P_K &= -\overline{uv} \frac{dU}{dy} \simeq -2\overline{uv}\Omega = -\overline{uv} \frac{U_b}{h} Ro \\ &\simeq \left[u_{\tau u}^2 - u_\tau^2(y+1) - U_b^2 \frac{Ro}{Re} \right] \frac{U_b}{h} Ro \end{aligned} \quad (5)$$

Consequently,

$$\frac{hP_K}{u_\tau^2 U_b Ro} \simeq -(y+1) + \left(\frac{u_{\tau u}}{u_\tau} \right)^2 - \left(\frac{U_b}{u_\tau} \right)^2 \frac{Ro}{Re}. \quad (6)$$

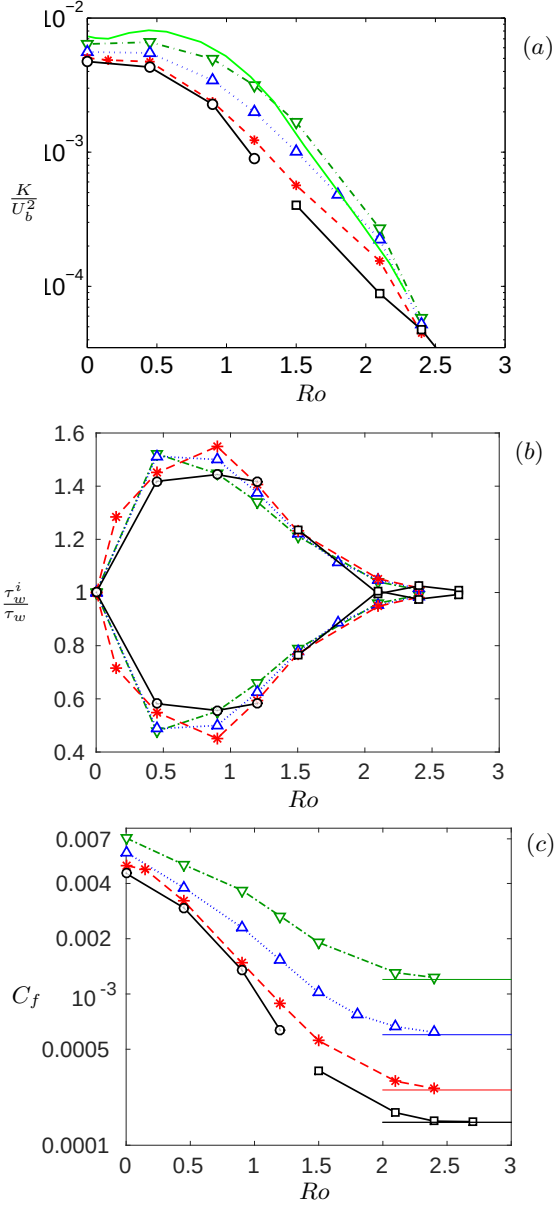


FIG. 10. (a) $K_m/(U_b^2)$, (b) τ_w^u/τ_w (upper curves) and τ_w^s/τ_w , (c) C_f . $\circ$ — $\circ$, $Re = 31\,600$; $\square$ — $\square$, $Re = 30\,000$; $*$ — $*$, $Re = 20\,000$; $\triangle$ — $\triangle$, $Re = 10\,000$; ∇ — ∇ , $Re = 5\,000$; —, $Re_\tau = 180$ (Xia *et al.* 2016). The horizontal line in (c) represent C_f for a laminar Poiseuille flow.

Thus, the profile of P_K scaled with $u_\tau^2 U_b Ro/h = (u_\tau^4/\nu)(Ro_\tau/Re_\tau)$, where $Ro_\tau = 2\Omega h/u_\tau$ and u_τ^4/ν is the usual viscous wall unit scaling, is expected to be approximately linear in y with a slope -1 in the part of the channel where $dU/dy \simeq 2\Omega$.

Figure 11.(a) shows P_K scaled by $u_\tau^2 U_b Ro/h$ for Ro up to 2.1. The DNS results for $Ro = 0$ are included and scaled by $0.45u_\tau^2 U_b/h$, i.e., the same scaling as used for the $Ro = 0.45$ case. The profiles of P_K in the rotating cases show as expected a significant linear part with a

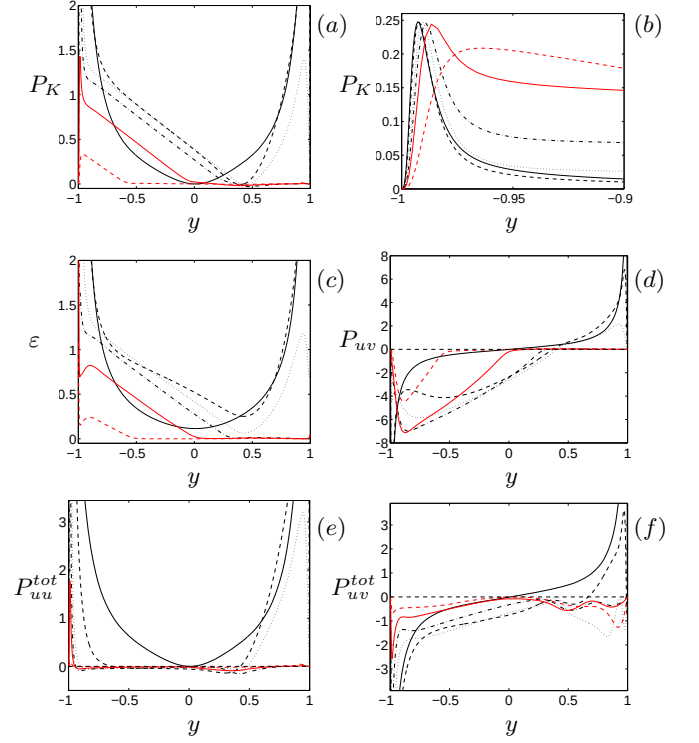


FIG. 11. (a) P_K scaled by $u_\tau^2 U_b Ro/h$ and (b) P_K scaled by u_τ^4/ν . (c) ε and (d) P_{uv} and (e) $P_{uv}^{tot} = P_{uu} + C_{uu}$ and (f) $P_{uv}^{tot} = P_{uv} + C_{uv}$ scaled by $u_\tau^2 U_b Ro/h$. $Re = 31\,600$ and (—) $Ro = 0$, (---) $Ro = 0.45$, ($\cdots$) $Ro = 0.9$, ($-\cdot-\cdot-$) $Ro = 1.2$. $Re = 30\,000$ and (—) $Ro = 1.5$, ($-\cdot-\cdot-$) $Ro = 2.1$.

-1 slope. In this part, the scaled P_K follows closely the prediction given by the right-hand-side of equation (6). Similar linear profiles of P_K were observed in DNSs of rotating channel flow at $Re_\tau = 180$ by Xia *et al.* (2016). Near the maximum of U slight negative values of P_K are observed at some Ro , as in the DNSs by Grundestam *et al.* (2008), which implies that some energy is transferred from turbulence to the mean flow in this region. The maximum value of P_K found near the wall on the unstable side scales instead in terms of viscous walls units because the peak of P_K lies between 0.244 and 0.248 for $Ro \leq 1.5$ when scaled by u_τ^4/ν (figure 11.b).

In shear flows, the dissipation rate of turbulent kinetic energy, ε , is often approximately equal to the production of turbulent kinetic energy, P_K , which suggests that ε , like P_K , scales with $u_\tau^2 U_b Ro/h$. Figure 11.(c) affirms that in rotating channel flow profiles of ε , scaled by $u_\tau^2 U_b Ro/h$, display a linear part. The DNS results for $Ro = 0$ are again included and scaled by $0.45u_\tau^2 U_b/h$. The slopes at $Ro = 0.45$ and $Ro = 2.1$ deviate from -1 , but in the other three rotating cases it follows closely the prediction given by the right-hand-side of equation (6). For $Ro \geq 0.9$, P_K and ε are in fact stinkingly similar in the outer layer on the unstable channel side, much more so than at $Ro = 0$.

The close balance between P_K and ε implies that the sum of turbulent, pressure and viscous diffusion in the equation for turbulent kinetic energy is small compared to P_K and ε . In terms of wall units, P_K and ε are large on the unstable side away from the wall in the rotating cases compared to the $Ro = 0$ case. On the other hand, on the stable side both are very small if $Ro \geq 1.2$.

The observed scaling of P_K and ε with $u_\tau^2 U_b Ro/h$ suggests that this scaling is meaningful as well for the budget terms in the balance equation for the Reynolds stresses. This equation reads

$$\frac{\partial \overline{u_i u_j}}{\partial t} + U_k \frac{\partial \overline{u_i u_j}}{\partial x_k} = P_{ij} + \varepsilon_{ij} + C_{ij} + \Pi_{ij} + D_{ij}, \quad (7)$$

where the terms on the right-hand-side are the production, dissipation, Coriolis, pressure-strain and diffusion term respectively, see also Grundestam *et al.* (2008). The Coriolis terms in the equation for $\overline{uu}$, $\overline{vv}$, $\overline{ww}$ and $\overline{uv}$ stresses are $C_{uu} = 4\overline{uv}\Omega$, $C_{vv} = -4\overline{uv}\Omega$, $C_{ww} = 0$ and $C_{uv} = 2(\overline{vv} - \overline{uu})\Omega$, respectively. Note that the production of $\overline{uu}$ stresses, $P_{uu} = 2P_K$.

Figure 11.(d) shows the production of $\overline{uv}$ Reynolds stresses, $P_{uv} = \overline{vvd}U/dy$, scaled by $u_\tau^2 U_b Ro/h$. Also in this figure and figure 12, data for $Ro = 0$ are included using the scaling $0.45u_\tau^2 U_b/h$ in order to make a comparison with data of rotating channel flow possible. The profiles of P_{uv} show less spreading than when using the ordinary wall unit scaling and also reveal an approximately linear slope on the unstable side at $Ro \geq 0.9$. On the stable side P_{uv} is significant at $Ro = 0.45$ and very small for $Ro \geq 1.2$.

The Coriolis terms in the balance equations of the $\overline{uu}$ and $\overline{vv}$ Reynolds stresses are $C_{uu} = 2\overline{uv}/u_\tau^2$ and $C_{vv} = -2\overline{uv}/u_\tau^2 = -C_{uu}$ respectively, when scaled by $u_\tau^2 U_b Ro/h$. Profiles of $\overline{uv}/u_\tau^2$ were already presented in figure 6.(d). From these profiles it follows that on the unstable side the Coriolis term transfers energy from $\overline{uu}$ to the $\overline{vv}$ component in rotating channel flow. On the stable side it is the other way around for $Ro = 0.45$ and 0.9 whereas it is small in the other cases.

In the part of the channel where $dU/dy \simeq 2\Omega$, $P_{uu} \simeq -4\overline{uv}\Omega = -C_{uu}$, implying that the Coriolis term closely balances the production term and therefore the dissipation term approximately balances the pressure-strain term in the equation for the $\overline{uu}$ component since the transport terms are small. This is confirmed by the DNSs but not shown here. In fact, the sum $P_{ij} + C_{ij}$ may be considered as a total production term. When $dU/dy \simeq 2\Omega$ this total production term in the equation of the $\overline{uu}$, $\overline{vv}$ and $\overline{ww}$ components is approximately 0, P_{uu} and 0, respectively, since $P_{uu} \simeq -C_{uu} = C_{vv}$ as explained above and $P_{vv} = P_{ww} = C_{ww} = 0$. Figure 11.(e) shows $P_{uu} + C_{uu}$ scaled by $u_\tau^2 U_b Ro/h$ and confirms that in a considerable part of the unstable side this sum is nearly zero. In a non-rotating flow, production feeds energy in the $\overline{uu}$ component and then energy is redistributed to the other components. By contrast, in rotating channel flow we can observe that on the unstable

side this total production feeds energy mainly in the $\overline{vv}$ component and pressure-strain correlations redistribute this energy to the $\overline{uu}$ and $\overline{ww}$ components. This might explain the strong wall-normal velocity fluctuations observed in rotating channel flow on the unstable side. Nevertheless, very near the wall on the unstable side energy is still fed into the $\overline{uu}$ component and the same applies to the stable side for $Ro = 0.45$ and 0.9 ; at $Ro \geq 1.2$ the sum is nearly zero there. We can also observe that $P_{uu} + C_{uu}$ is slightly negative in rotating channel flow in a region around the maximum of U .

The Coriolis term in the equation for the shear stress $\overline{uv}$, $C_{uv} = (\overline{vv} - \overline{uu})/u_\tau^2$ when scaled by $u_\tau^2 U_b Ro/h$. The total production $P_{uv} + C_{uv}$ scaled by $u_\tau^2 U_b Ro/h$ is shown in figure 11.(f). This total production is balanced by Π_{uv} since the dissipation and diffusion terms are relatively small in a large part of the channel, in particular on the unstable side. On the unstable side, $P_{uv} + C_{uv}$ scaled is negative, but it becomes less negative for $Ro \geq 0.9$. On the stable side it is positive at $Ro = 0.45$ whereas at larger Ro it is negative and thus counteracts the production of uv correlations.

Pressure-strain correlations Π_{uu} , Π_{vv} , Π_{ww} and Π_{uv} in the $\overline{uu}$, $\overline{vv}$, $\overline{ww}$ and $\overline{uv}$ Reynolds stress equations scaled by $u_\tau^2 U_b Ro/h$ are presented in figure 12. Whereas at $Ro = 0$ energy is transferred from $\overline{uu}$ to $\overline{vv}$ and $\overline{ww}$, in the rotating cases energy is transferred from $\overline{vv}$ to $\overline{uu}$ and $\overline{ww}$ by pressure-strain correlations on the unstable side, except very close to the wall where Π_{uu} is still negative. At larger Ro , Π_{uv} is especially large which explains the strong spanwise fluctuations in rapidly rotating channel flows. On the stable side there is a significant energy transfer from the $\overline{uu}$ to the other two components by pressure-strain correlations for $Ro \leq 0.9$. At larger Ro the pressure-strain correlations Π_{uu} and Π_{vv} are small but not negligible on the stable side while Π_{uv} is positive (figure 11.(d) and approximately balanced by the Coriolis term C_{uv} as discussed before. Once again the slope of the pressure-strain profiles on the unstable side is approximately linear for $Ro \geq 0.9$ and scales with $u_\tau^2 U_b Ro/h$.

Turbulent velocity fluctuations are not insignificant on the stable side (figure 6), although P_K is very small on the stable side for $Ro \geq 1.2$. Grundestam *et al.* (2008) have suggested that the turbulence on the stable side is forced by the turbulence on the unstable side through the pressure diffusion term of the $\overline{vv}$ component which then redistributes the energy through pressure-strain correlations. The pressure diffusion of $\overline{vv}$ has a small positive value (not shown here) and in figure 12.(a) and (b) we can indeed observe that, albeit small, Π_{vv} is negative and Π_{uu} positive at $Ro = 1.2$ and 1.5 on the stable side. The latter is approximately balanced by a negative total production $P_{uu} + C_{uu}$.

VII. SPECTRA

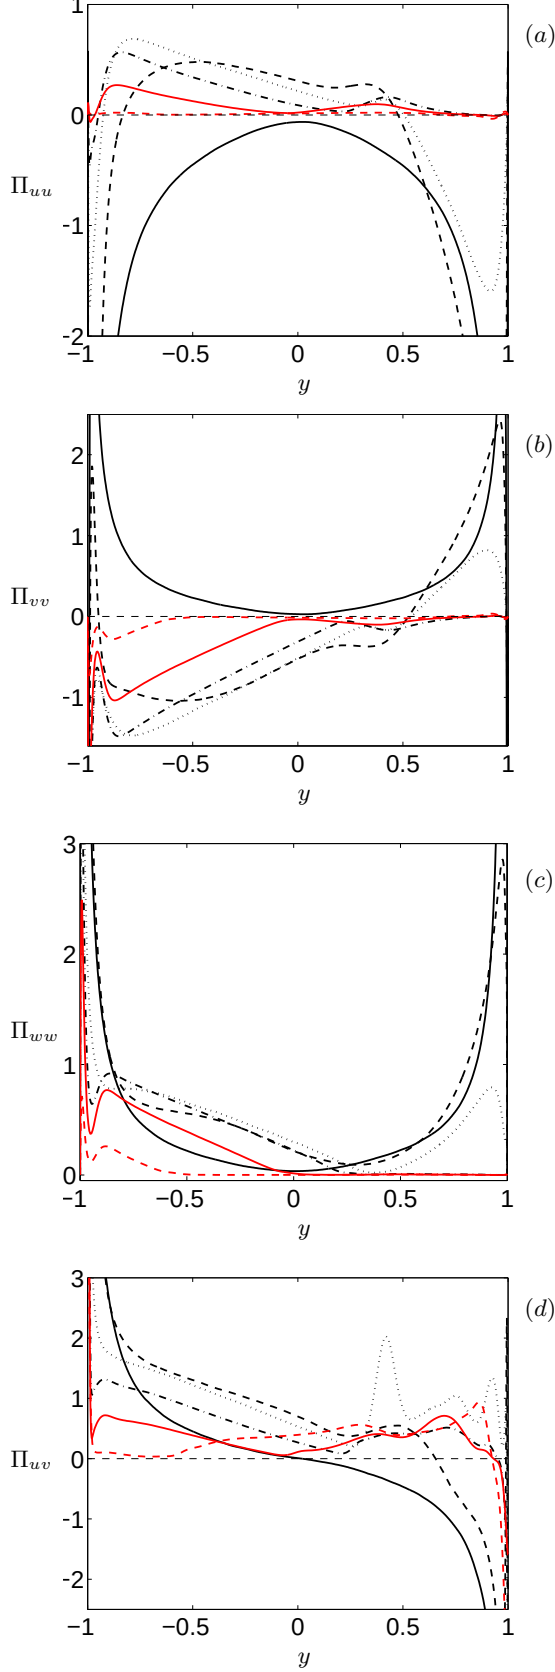


FIG. 12. (a) Π_{uu} , (b) Π_{vv} , (c) Π_{ww} and (d) Π_{uv} scaled by $u_\tau^2 U_b Ro/h$. Lines used as in figure 11.

In order to study the effect of rotation on turbulence structures in a quantitative way Kristoffersen & Andersson (1993), Alvelius (1999) and Grundestam *et al.* (2008) computed two-point correlations at $Re_\tau = 180$ to 194. Kristoffersen & Andersson observed that the spanwise near-wall streak spacing in wall units narrows with Ro whereas Alvelius observed the opposite trend. Generally, relatively short streamwise two-point correlations of streamwise fluctuations on the unstable side and relatively long ones on the other laminar-like side were observed when the channel was rotating. At low Ro Kristoffersen & Andersson and Alvelius could also notice an impact of Taylor-Görtler vortices on correlations on the unstable side.

Here, I present spectra since they reveal better the impact of rotation on the different flow scales, especially the large scales which are known to become important at higher Re in wall flows (Smits *et al.* 2011). The focus is on the strongly turbulent unstable side of the channel since spectra are less instructive for the stable side when relaminarization occurs. Spanwise premultiplied energy spectra, $k_z \Phi_{uu}$, $k_z \Phi_{vv}$ and $k_z \Phi_{ww}$ of the streamwise, wall-normal and spanwise velocity fluctuations, respectively, and cospectra, $k_x \Phi_{uv}$, are shown in figure 13. Streamwise premultiplied energy spectra, $k_x \Phi_{uu}$, $k_x \Phi_{vv}$ and $k_x \Phi_{ww}$ of the streamwise, wall-normal and spanwise velocity fluctuations, respectively, and cospectra, $k_x \Phi_{uv}$, are shown in figure 14. Spectra are shown for $Ro = 0, 0.15, 0.45$ and 0.9 and $Re = 20\,000$, and are presented as function of the wall distance $y^* = (y + 1)u_{\tau u}/\nu$ and the spanwise and streamwise wave length λ_z^* and λ_x^* , respectively, both scaled in term of the viscous length scale of the unstable side, $l^* = \nu/u_{\tau u}$. The red dashed line in each plot indicates scales with a wavelength h . Spectra are scaled with their maximum value, which are given in terms of $u_{\tau u}$ in table II.

TABLE II. Maximum values of the premultiplied one-dimensional energy spectra. Superscript $\star$ means the maximum value of the quantity. Spectra are scaled with the friction velocity of the unstable side, u_τ^u .

Ro	$\frac{k_z \Phi_{uu}^*}{u_\tau^u u_\tau^2}$	$\frac{k_z \Phi_{vv}^*}{u_\tau^u u_\tau^2}$	$\frac{k_z \Phi_{ww}^*}{u_\tau^u u_\tau^2}$	$\frac{k_z \Phi_{uv}^*}{u_\tau^u u_\tau^2}$	$\frac{k_x \Phi_{uu}^*}{u_\tau^u u_\tau^2}$	$\frac{k_x \Phi_{vv}^*}{u_\tau^u u_\tau^2}$	$\frac{k_x \Phi_{ww}^*}{u_\tau^u u_\tau^2}$	$\frac{k_x \Phi_{uv}^*}{u_\tau^u u_\tau^2}$
0	3.83	0.56	0.73	0.58	2.13	0.40	0.66	0.28
0.15	3.85	0.75	1.00	0.57	2.15	0.32	0.56	0.28
0.45	3.01	1.60	1.39	0.49	1.89	0.59	0.64	0.27
0.9	1.67	2.13	1.86	0.46	1.24	1.04	0.95	0.29

In non-rotating channel flow we observe in the spanwise spectra, besides the streaks at $\lambda_z^* \sim 100$ indicated by the near-wall peak in $k_z \Phi_{uu}$, the signature of large wide structures of wavelength $\lambda_z \sim h$ in $k_z \Phi_{uu}$ and $k_z \Phi_{uv}$ further away from the wall, (figure 13.a), like in the DNS by Lee & Moser (2015). In the streamwise spectra $k_x \Phi_{uu}$

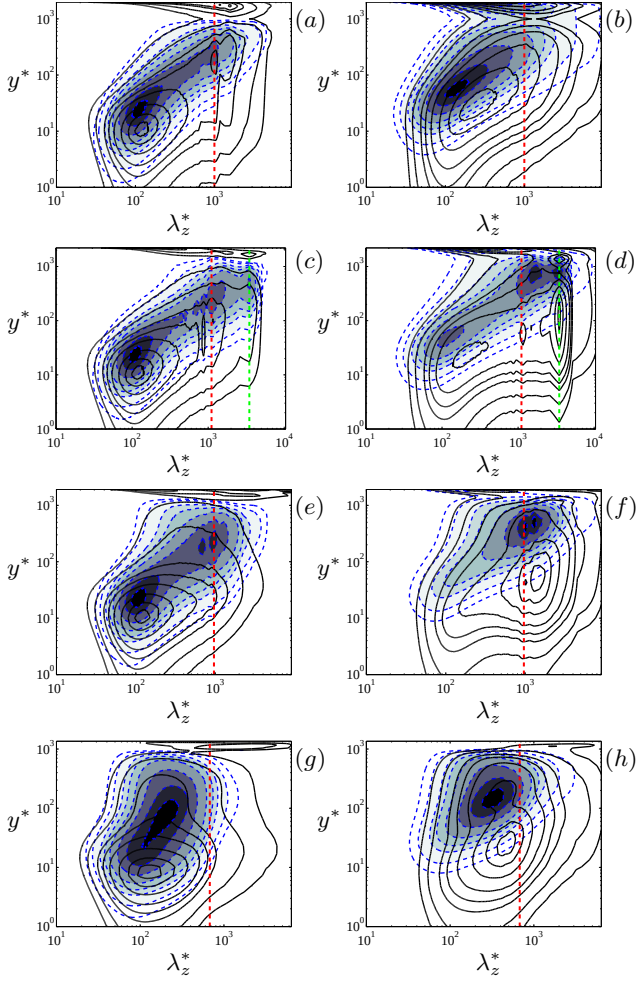


FIG. 13. Maps of premultiplied one-dimensional energy spectra as function of spanwise wavelength λ_z^* and distance from the wall y^* at $Re = 20000$ for $Ro = 0$ (a, b), $Ro = 0.15$ (c, d), $Ro = 0.45$ (e, f) and $Ro = 0.9$ (g, h). Left column shows $k_z \Phi_{uu}$ (black lines) and cospectra $k_z \Phi_{uv}$ (blue dashed lines and colours). Right column shows $k_z \Phi_{vv}$ (blue dashed lines and colours) and $k_z \Phi_{ww}$ (black lines). Contour levels from innermost to outermost are 0.94, 0.8, 0.6, 0.4, 0.28, 0.2, 0.1 and 0.05. Spectra are scaled with their maximum value.

and $k_x \Phi_{uv}$ energetic peaks are seen at $\lambda_x^* \sim 1000$ near the wall related to the near-wall cycle (Monty *et al.* 2009). In the outer layer weakly energetic longer structures with wavelengths $\lambda_z \sim 3h$ to $10h$ are observed in $k_x \Phi_{uu}$ (figure 14.a), which become more energetic at higher Re (Lee & Moser 2015).

The near-wall peak in the spanwise spectrum $k_z \Phi_{uu}$ and streamwise spectrum $k_x \Phi_{uu}$ changes little in the rotating cases so that a change of the streak spacing as a consequence of rotation, as suggested by Kristoffersen & Andersson (1993) and Alvelius (1999), cannot be confirmed. However, at $Ro = 0.15$, $k_z \Phi_{vv}$ has three peaks caused by near-wall structures of wavelength $\lambda_z^* \sim 150$ around $y^* = 50$ and large structures with wavelengths

$\lambda_z \sim h$ and $\lambda_z \sim \pi h$ (the latter indicated by the green dashed line) in the outer layer of the unstable side (figure 13.d). Similar peaks are observed in $k_z \Phi_{ww}$ at wavelengths $\lambda_z \sim 1.5h$ and $\lambda_z \sim \pi h$ in the outer layer. These peaks in the outer layer at $\lambda_z \sim 1.5h$ and πh are almost certainly related to the counter-rotating roll cells of spanwise size $\pi h/2$ seen previously in figure 3.(a). According to the streamwise spectra in figure 14.(c) and (d) these roll cells span the whole domain in the streamwise direction. Roll cells of the same spanwise size have been observed in DNS at $Ro = 0.15$ at a lower $Re_\tau = 180$ (Yang & Wu 2012), indicating that the size of the roll cells at this Ro is independent of Re .

Going to a larger $Ro = 0.45$, the peaks in the spanwise spectra $k_z \Phi_{vv}$, $k_z \Phi_{ww}$ have, compared to the spectra at $Ro = 0$, clearly shifted towards larger scales of spanwise wavelength $\lambda_z \sim h$ to $1.5h$ (figure 13.f) and these of the streamwise spectra $k_x \Phi_{vv}$, $k_x \Phi_{ww}$ to a streamwise wavelength $\lambda_x \sim 9h$ (figure 14.f) in the outer layer. These large scale could again be related to roll cells, although they are smaller and appear less coherent in visualizations than at $Ro = 0.15$ and they do not appear to span the whole streamwise domain. These observations are consistent with the results shown by the spectra. The co-spectra also shows energetic wide and long scales in the outer layer and the peak in the spanwise spectrum $k_z \Phi_{uu}$ at $\lambda_z \sim h$ has disappeared (figure 13.e and 14.e).

At higher rotation rates large-scale structures become progressively less energetic. At $Ro = 0.9$ no energetic large scale structures are seen in the spanwise spectra $k_z \Phi_{uu}$ and $k_z \Phi_{uv}$ while $k_z \Phi_{ww}$ has a peak at spanwise wavelength $\lambda_z \sim 0.7h$ near the wall (figure 13.g and h). The streamwise spectrum of the streamwise velocity $k_x \Phi_{uu}$ has still a near-wall peak and that of the wall-normal velocity $k_x \Phi_{vv}$ has an outer peak at streamwise wave length $\lambda_x \sim h$, while the spectrum of the spanwise velocity $k_x \Phi_{ww}$ has two energetic peaks, an outer peak at streamwise wave length $\lambda_x \sim h$ and a near-wall peak at $\lambda_x \sim 2.5h$ (figure 14.g and h). The energetic scales are thus becoming shorter at higher Ro and there is no clear indication of roll cells observed in the spectra. Accordingly, no large structures like roll cells are observed in visualizations. Similar observations (not shown here) are made at yet higher Ro , i.e., no energetic wide or very long structures are present according to the spectra and the double peak in $k_x \Phi_{ww}$ persists.

Spectra at $Ro = 0.15$ at the stable side of the channel (not shown here) of the streamwise velocity have energetic scales at spanwise wavelength $\lambda_z^* \sim 100$ and streamwise wavelength $\lambda_x^* \sim 800$ near the wall, like on the unstable side, but these spectra and spectra of the other velocity components do not show energetic long and wide structures, although the flow is still fully turbulent on the stable side at this low Ro .

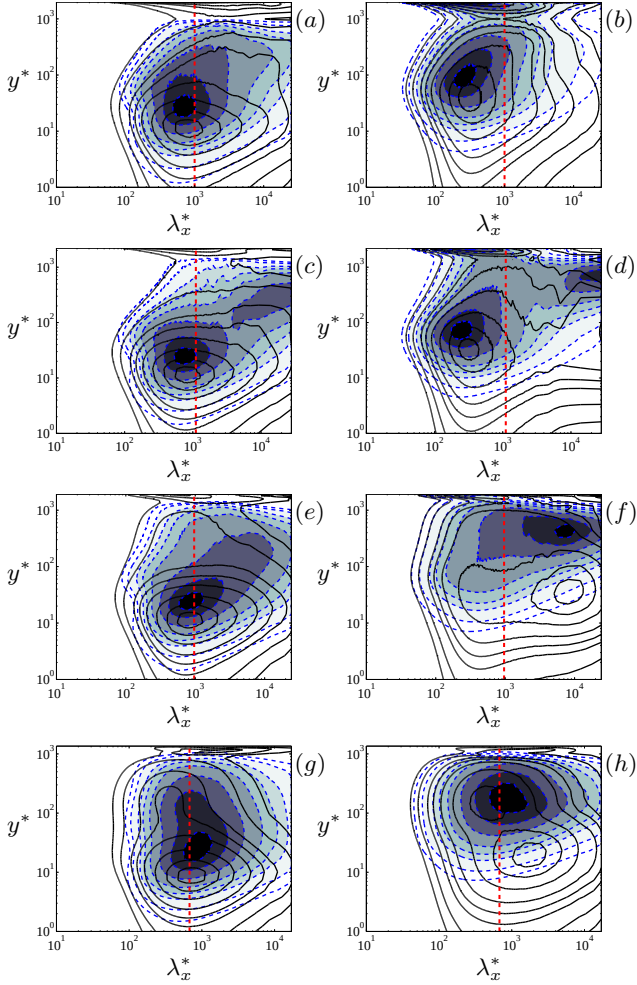


FIG. 14. Maps of premultiplied one-dimensional energy spectra as function of streamwise wavelength λ_x^* and distance from the wall y^* at $Re = 20\,000$ for $Ro = 0$ (a, b), $Ro = 0.15$ (c, d), $Ro = 0.45$ (e, f) and $Ro = 0.9$ (g, h). Left column shows $k_z \Phi_{uu}$ (black lines) and cospectra $k_z \Phi_{uv}$ (blue dashed lines and colours). Right column shows $k_z \Phi_{vv}$ (blue dashed lines and colours) and $k_z \Phi_{wv}$ (black lines). Contour levels from innermost to outermost are 0.94, 0.8, 0.6, 0.4, 0.28, 0.2, 0.1 and 0.05. Spectra are scaled with their maximum value.

VIII. CONCLUSIONS

The present numerical study of fully developed plane turbulent channel flow subject to system rotation about the spanwise direction covers a wide range of parameters with Re between 5000 and 31 600 and Ro between 0 and 2.7. At all Re and for a wide range of Ro the mean streamwise velocity profile has a linear part with a slope $dU/dy \simeq 2\Omega$ implying that this characteristic is independent of the Reynolds number. Profiles of the production and dissipation rate of turbulent kinetic energy and some of the budget terms in the Reynolds stress equations show, as a consequence, a linear part as well. Considering the production and Coriolis term together,

we can observe that in this part of the unstable channel side, basically all energy is fed into the wall-normal $\overline{vv}$ component. The energy is then redistributed to the streamwise and especially the spanwise Reynolds stress component through pressure-strain correlations.

By means of visualizations and one-dimensional spectra I have investigated the influence on rotation on turbulence structures. A distinct unstable side with intense turbulence and vortical structures and a stable side with much weaker turbulence develops in the channel with an apparent sharp border between the two sides. If Ro approaches 0.45 we can observe that the flow at higher Re partly relaminarizes on the stable side of the channel and that oblique turbulent-laminar patterns develop which resemble the oblique band-like structures found in transitional Couette and channel flows at low Reynolds numbers (Duguet *et al.* 2010, Tuckerman *et al.* 2014). It is somewhat remarkable that such patterns exist in rotating channel flow at a significantly higher Re . The study by Brethouwer *et al.* (2012) suggests that turbulent-laminar patterns similar to those found in my DNS at $Ro = 0.45$ and $Re = 20\,000$ to 31 600 also exist at lower Re but at a lower Ro and that the patterns most likely have a longer wave length at lower Re . In other words, the patterns could appear at low Re in DNSs of rotating channel flow if much larger computational domains are used than in previous studies.

If Ro is raised further in the present DNSs the turbulent fraction of the flow on the stable side goes down and eventually the flow relaminarizes there. The unstable side with strong turbulence diminishes in size with Ro and when the rotation rate is sufficiently high the whole flow becomes laminar. However, as shown by Brethouwer (2016), a linear instability can develop in rapidly rotating channel flows causing a continuous cycle of turbulent bursts.

On the unstable side of the channel, large counter-rotating streamwise roll cells are observed at low Ro . The spectra and visualizations show that the roll cells become smaller and less noticeable and eventually disappear if Ro is raised. This trend seems to be stronger at higher Re since the present and previous studies indicate that at low Re roll cells persist at higher Ro (Grundestam *et al.* 2008). Large-scale structures are present on the unstable side if Ro is low, but they become less energetic at higher Ro .

The influence of Re is also investigated and found to be significant. At fixed Ro Reynolds stresses are noticeable stronger on the stable side of the channel at higher Re , at least if $Ro = 0.45$ or 0.9. Whereas turbulent-laminar patterns are found on the stable side at $Ro = 0.45$ if $Re \geq 20\,000$ they are not observed at the same Ro at lower Re . On the other hand, roll cells appear to be more prominent on the unstable side of rotating channel flow if Re is lower. One therefore has to be careful when drawing general conclusions from previous lower Reynolds number studies of rotating channel flow.

-
- [1] ALVELIUS, K. 1999 Studies of turbulence and its modelling through large eddy- and direct numerical simulations. PhD thesis, Department of Mechanics, KTH, Stockholm, Sweden.
- [2] BARKLEY, D. & TUCKERMAN, L. S. 2007 Mean flow of turbulent-laminar patterns in plane Couette flow. *J. Fluid Mech.* **576**, 109–137.
- [3] Brethouwer, G., The effect of rotation on rapidly sheared homogeneous turbulence and passive scalar transport. Linear theory and direct numerical simulations. *J. Fluid Mech.* **542**, 305–342 (2005).
- [4] Brethouwer, G., Linear instabilities and recurring bursts of turbulence in rotating channel flow simulations. *Phys. Rev. Fluids* **1**, 054404 (2016).
- [5] BRETHOUWER, G., DUGUET, Y., SCHLATTER, P. 2012 Turbulent-laminar coexistence in wall flows with Coriolis, buoyancy or Lorentz forces. *J. Fluid Mech.* **704**, 137–172.
- [6] Brethouwer, G., Schlatter, P., Duguet, Y., Henningson, D.H., Johansson, A.V., Recurrent bursts via linear processes in turbulent environments. *Phys. Rev. Lett.* **112**, 144502 (2014).
- [7] CHEVALIER, M., SCHLATTER, P., LUNDBLADH, A. & HENNINGSON, D. S. 2007 A pseudo-spectral solver for incompressible boundary layer flows. *Technical Report TRITA-MEK 2007:07, KTH Mechanics, Stockholm, Sweden.*
- [8] DEUSEBIO, E., BRETHOUWER, G., SCHLATTER, P., LINDBORG, E. 2014 A numerical study of the stratified and unstratified Ekman layer. *J. Fluid Mech.* **755**, 672–704.
- [9] DUGUET, Y., SCHLATTER, P. & HENNINGSON, D. S. 2009 Formation of turbulent patterns near the onset of transition in plane Couette flow. *J. Fluid Mech.* **650**, 119–129.
- [10] O. Grundestam, S. Wallin, and A.V. Johansson, Direct numerical simulations of rotating turbulent channel flow. *J. Fluid Mech.* **598**, 177–199 (2008).
- [11] Jakirlić, S., Hanjalić, K., Tropea, C., Modeling rotating and swirling turbulent flows: a perpetual challenge. *AIAA J.* **40**, 1984 (2002).
- [12] JEONG, J., HUSSAIN, F. 1995 On the identification of a vortex. *J. Fluid Mech.* **285**, 69–94.
- [13] J.P. Johnston, R.M. Halleen, and D.K. Lezius, Effects of spanwise rotation on the structure of two-dimensional fully developed turbulent channel flow. *J. Fluid Mech.* **56**, 533 (1972).
- [14] Kim, J., Moin, P., Moser, R. 1987 Turbulence statistics in fully developed channel flow at low Reynolds number. *J. Fluid Mech.* **177**, 133–166.
- [15] R. Kristoffersen and H.I. Andersson, Direct simulations of low-Reynolds number turbulent flow in a rotating channel. *J. Fluid Mech.* **256**, 163 (1993).
- [16] Lamballais, E., Lesieur, M., Métais, O., Effects of spanwise rotation on the vorticity stretching in transitional and turbulent channel flow. *Int. J. Heat Fluid Flow* **17**, 324–332 (1996).
- [17] Lee, M., Moser, R.D. 2015 Direct numerical simulation of turbulent channel flow up to $Re_\tau \sim 5200$. *J. Fluid Mech.* **774**, 395–415.
- [18] Lenaers, P., Li, Q., Brethouwer, G., Schlatter, P., Örlü, R. 2012 Rare backflow and extreme wall-normal velocity fluctuations in near-wall turbulence. *Phys. Fluids* **24**, 035110.
- [19] Liu, N.-S., Lu, X.-Y. 2007 Direct numerical simulation of spanwise rotating turbulent channel flow with heat transfer. *Int. J. Numer. Meth. Fluids* **53**, 1689–1706.
- [20] Mathis, R., Hutchins, N., and Marusic, I. 2009 Large-scale amplitude modulation of the small-scale structures in turbulent boundary layers *J. Fluid Mech.* **628**, 311–337.
- [21] Monty, J.P., Hutchins, N., Ng, H.C.H., Marusic, I., Chong, M.S. 2009 A comparison of turbulent pipe, channel and boundary layer flows. *J. Fluid Mech.* **632**, 431–442.
- [22] Nagano, Y., Hattori, H. 2003 Direct numerical simulation and modelling of spanwise rotating channel flow with heat transfer. *J. Turbulence* **4**, 010.
- [23] Nakabayashi, K., and Kitoh, O., Turbulence characteristics of two-dimensional channel flow with system rotation, *J. Fluid Mech.* **528**, 355–377 (2005).
- [24] Schmid, P.J., Henningson, D.S. (2001) *Stability and transition in shear flows*, Applied Mathematical Sciences **142**, Springer.
- [25] Smits, A.J., McKeon, B.J., and Marusic, I. High Reynolds number wall turbulence. *Ann. Rev. Fluid Mech.* **43**, 353–375.
- [26] Tritton, D.J., Stabilization and destabilization of turbulent shear flow in a rotating fluid. *J. Fluid Mech.* **241**, 503–523 (1992).
- [27] Tuckerman, L.S., Kreilos, T., Schrobdsdorff, H., Schneider, T.M., Gibson, J.F. 2014 Turbulent-laminar patterns in plane Poiseuille flow. *Phys. Fluids* **26**, 114103.
- [28] S. Wallin, O. Grundestam, and A.V. Johansson, *J. Fluid Mech.* **730**, 193 (2013).
- [29] XIA, Z., SHI, Y., CHEN, S. 2016 Direct numerical of turbulent channel flow with spanwise rotation. *J. Fluid Mech.* **788**, 42–56.
- [30] YANG, Y.-T., WU, J.-Z. 2012 Channel turbulence with spanwise rotation studied using helical wave decomposition. *J. Fluid Mech.* **692**, 137–152.